



# Concepteur Fabricant

## PORTABLE ENERGY CASE



Autonomous power supply case with lead battery 12V / 26 Ah

### Characteristics :



- Energy case perfectly isolated, resistant to dust, shocks and projections.
- Provides power to multiple consumers (Pc, printer, screen, mobile,...) anywhere
- For interior or exterior, /mobile application : IP 44 leaktightness
- Multi-voltage outputs :
  - 2 x 230 V
  - 1 x 5 V / 500 mA
  - 12 V en option
- Power up with key, indicator light
- Voltage output: 2x 230 V AC
- USB output: 1x 5 V / 500 mA
- Nominal power : 600 W
- Frequency : 50 Hz
- Sinewave current
- Integrated charger: 12 V / 4 A
- Operating temperature between -40 to 50°C

### Warranties :

- The manufacturer's warranty is 2 years (parts and labour), applicable to all component parts used in the cabinet with the exception of the battery pack
- The batteries are guaranteed for 300 discharge/recharge cycles.

### Advantages :

- Hanging of the case effortlessly
- Totally transportable
- Ideal for mobile applications

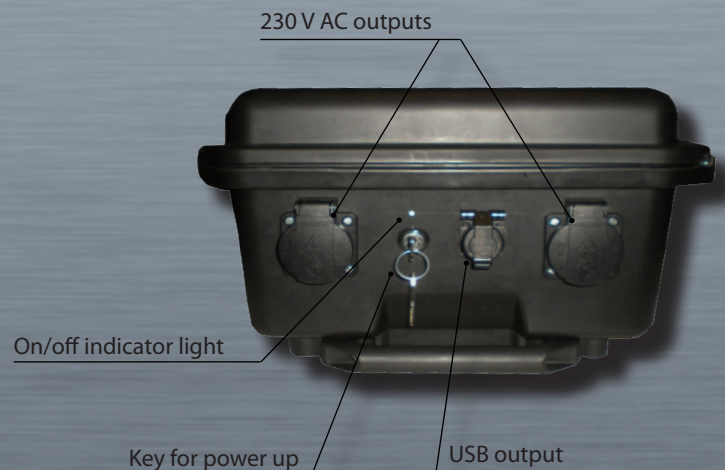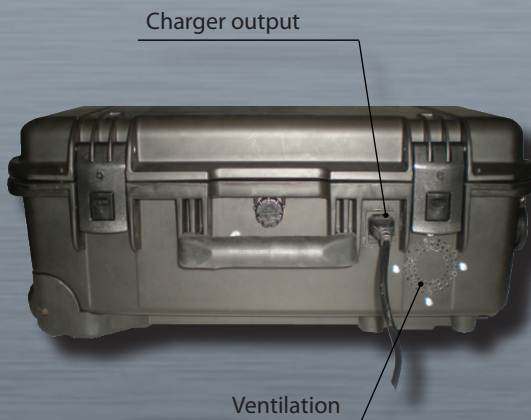

# Postes de travail fixes et mobiles

## CARACTÉRISTIQUES TECHNIQUES

	BATTERIES CAPACITY
Characteristics	12 V - 26 Ah
Baterries technology	Lead
Voltage output	2 x 230 V AC
USB output	1 x 5 V / 500 mA
Nominal power	600 W
Frequency	50 Hz
Type of current	Sinewave
Integrated charger	12 V
Operating temperature	Between - 40°C à 50 °C
Storage temperature	Between - 20°C à 35 °C
Dimension (mm)	L 550 x P 226 x H 358
Weight	19 Kg
Certification (case only)	ATA 300
Estimate loading time	Between 4 and 8 hours

Autonomy is estimated between 1h and 8 h : depends of the consumers